

CROWN DEEP CYCLE RANGE OVERVIEW



www.shieldbatteries.co.uk


CROWN DEEP CYCLE



- Over 90 years of Battery Manufacturing in the US.
- Rugged, SolidCast™ plates that result in longer battery life and work (or play!) as hard as you do.
- Range of 6, 8 & 12 volt Deep Cycle Batteries.
- Exclusive C-Force™ Active Mass for increased charge acceptance and discharge times.
- PosiWrap™ plate separators and other proprietary Crown components cut maintenance, add peace of mind.



Type	AMP- HR CAPACITY		RESERVE CAPACITY MINS			STORAGE		DIMENSIONS								Terminal	Layout
	20-Hr Rate	5-Hr Rate	75- Amps	56- Amps	25- Amps	kWh¹ 100-Hr	kWh¹ 20-Hr	Inches			Millimetres			Weight			
								L	W	H	L	W	H	Lbs	Kgs		
6 Volt Commercial Deep Cycle Batteries																	
CR-205	205	170	105	---	365	1.33	1.19	10.25	7.06	10.94	260	179	278	56	25.4	STD	0
CR-220	220	180	110	---	385	1.43	1.28	10.25	7.06	10.94	260	179	278	60	27.2	STD, S	0
CR-235	235	185	122	---	450	1.51	1.37	10.25	7.06	10.94	260	179	278	63	28.6	STD, S	0
CR-240	240	195	135	---	485	1.54	1.4	10.25	7.06	10.94	260	179	278	68	30.8	STD	0
CR-DGC	240	195	130	---	480	1.54	1.4	9.63	7.5	10.75	245	191	273	65	29.5	A	0
CR-260	260	215	150	---	525	1.7	1.51	10.25	7.06	11.63	260	179	295	75	34	STD,S	0
CR-250	250	215	150	---	540	1.63	1.46	11.75	7.19	11.13	298	183	283	76	34.5	STD	0
CR-305	305	255	170	---	620	1.95	1.78	12.19	7.19	14.13	310	183	359	90	40.8	STD	0
CR-330	330	270	190	---	676	2.12	1.92	12.19	7.19	14.13	310	183	359	93	42.2	STD	0
CR-350	350	290	210	---	725	2.27	2.04	12.19	7.19	14.13	310	183	359	101	45.8	STD	0
CR-370	370	295	190	---	750	2.42	2.15	12.38	7.19	16.13	314	183	410	109	49.4	STD	0
CR-390	390	310	215	---	790	2.53	2.27	12.38	7.19	16.13	314	183	410	115	52.2	STD	0
CR-430	430	340	240	---	920	2.79	2.5	12.38	7.19	16.13	314	183	410	122	55.3	STD	0
8 Volt Commercial Deep Cycle Batteries																	
CR-150	150	120	65	90	250	1.28	0.87	10.31	7.06	10.82	262	179	275	60	27.2	STD	1
CR-165	165	140	82	117	304	1.4	0.96	10.31	7.06	10.82	262	179	275	64	29	STD	1
CR-190	190	155	95	135	353	1.63	1.11	10.31	7.06	10.82	262	179	275	69	31.3	STD	1
12 Volt Commercial Deep Cycle Batteries																	
24HDC	90	70	33	---	140	1.11	0.52	11.06	6.81	9.38	281	173	238	50	22.7	STD	1
27HDC	115	95	43	---	180	1.51	0.67	12.95	6.81	9.38	329	173	238	58	26.3	STD	1
31HDC	130	105	46	---	200	1.69	0.76	13	6.75	9.38	330	171	238	66	29.9	STD	1
CR-GC150	150	120	61	103	243	1.92	0.87	12.92	7.06	10.53	328	179	267	81	36.7	STD	1
CR-GC155	155	125	75	110	286	1.98	0.90	12.92	7.06	10.53	328	179	267	88	39.9	STD	1
CR-185	185	150	85	---	326	2.39	1.08	15.5	7	14.63	394	178	372	107	48.5	STD	0
CR-195	192	160	100	---	370	2.5	1.13	15.5	7	14.63	394	178	372	107	48.5	STD	0
CR-215	215	175	118	---	429	2.79	1.25	15.5	7	14.63	394	178	372	120	54.4	STD	0

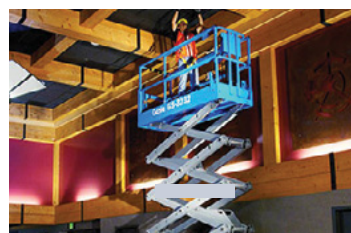





Type	ELECTRICAL CAPACITY					DIMENSIONS								Terminal	Layout
	Volts	Ah	MCA Rating	CCA Rating	RC Minutes	Inches			Millimetres			Weight			
						L	W	H	L	W	H	Lbs	Kgs		
12 Volt Crown Marine Deep Cycle															
27DC105	12	105	---	---	40	12.95	6.81	9.38	329	173	238	52	23.6	STD	0
31MDC-120	12	120	1250	1000	190	13	6.75	9.38	330	171	238	60	27.2	STD	1
12 Volt Crown Heavy Duty															
31A-XD	12	120	---	1100	---	13	6.75	9.38	330	171	238	61	27.6	A	9
4D-XD	12	200	1625	1300	375	20.75	8.63	10	527	219	254	111	50.3	A	4
8D-XD	12	225	1810	1450	430	20.75	11	10	527	279	254	128	58.1	A	4
12 Volt Crown Severe Duty-CV															
31DTSDC-XD	12	120	1250	1000	190	13	6.75	9.38	330	171	238	60	27.2	STD	1
4DSDC-XD	12	200	1625	1300	375	20.75	8.63	10	527	219	254	111	50.3	A	4
8DSDC-XD	12	225	1810	1450	430	20.75	11	10	527	279	254	128	58.1	A	4

CROWN AGM

- All Critical Applications
- Maintenance Free
- Super Clean AGM Lead Batteries
- Safest, Most Sustainable Energy Storage Option
- Robust Design Tolerates Deep Discharge
- Sealed, Spill-proof and easy to Deploy

Type	ELECTRICAL CAPACITY					DIMENSIONS								Terminal	Layout
	Volts	Ah	MCA Rating	CCA Rating	RC Minutes	Inches			Millimetres			Weight			
						L	W	H	L	W	H	Lbs	Kgs		
6CRV215	6	215	---	670	---	12.05	6.89	8.08	306	175	205	65	29.5	M6(F)	0
6CRV220	6	220	---	---	105	10.25	7.06	10.94	260	179	278	66	30	STD	0
12CRV80	12	80	---	---	140	11.26	6.75	9.38	286	171	238	51	23.1	STD	1
12CRV100	12	98	---	---	170	13	6.75	9.38	330	171	238	59	27	STD	1
12CRV110	12	110	---	---	200	13	6.75	9.44	330	171	240	60	27.2	STD	1

Available Terminals



Shield Batteries Ltd

277 Stansted Road,
Bishops Stortford,
Hertfordshire. CM23 2BT

Telephone: 01279 652067
Email: info@shieldbatteries.co.uk

powering the future since 1910...

Shield Batteries Ltd reserves the right to change or revise, without notice, any specification or other details given in this publication. E & OE.