


TAKING DELIVERY OF YOUR BATTERY


When you receive your new battery, if it is dry, remember its' service life begins when you put in the acid. Do not fill it more than 10mm above the elements. Within 2 hours of filling, ensure that the battery goes on charge. The battery will be charged when all cells are gassing freely. Periodically recharge during periods of vehicle inactivity. A range of chargers also available.

BATTERY FEATURES & SPECIFICATION GUIDE


Battery Hold Down & Features





Battery Terminal Layout

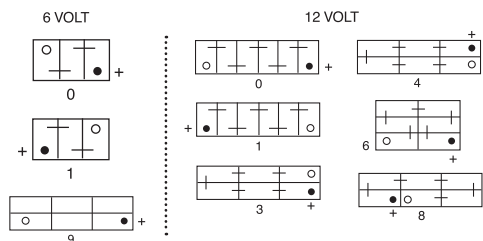

Battery Terminal Type



Lid Type

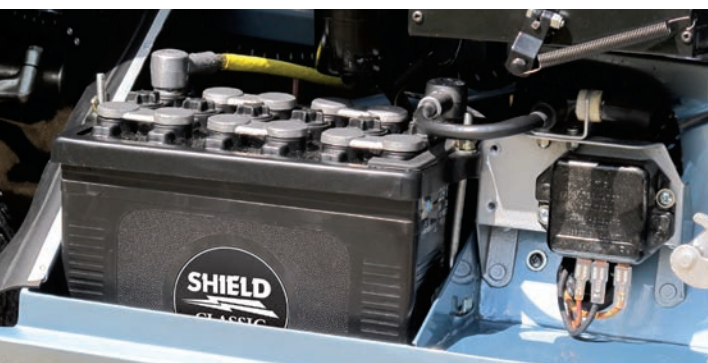


DON'T JUST TAKE OUR WORD FOR IT...

"Requiring a new set of 6 volt 11 plate batteries for my 1968 MGC I searched the internet for a local battery manufacturer specialising in classic car batteries offering both quality and value for money. Shield Batteries became my preferred supplier based on their extensive technical background, pricing and excellent response by the sales team to my initial e-mail enquiries. My subsequent order was processed efficiently and the batteries prepared ready for me to collect at the appointed time. I was particularly impressed with the smart/clean external appearance of the Shield Batteries factory in Bishops Stortford, which indicates to me that they take a pride in their business and delivering customer satisfaction. I have no hesitation in recommending Shield Batteries."

CLASSIC CAR OWNER

"Designed to perform and built to last."



www.shieldbatteries.co.uk

8848/4pp E2



CLASSIC

When appearance and performance are of equal factors, Shield Batteries manufacture to concourse standards, making them the ideal choice for the classic vehicle owner.

All our classic vehicle batteries are genuine hard rubber, matching the original manufacturers specification; and can be supplied either wet (fully charged) or dry-charge with acid packs and commissioning instructions. Have the ultimate classic car battery, giving the correct period look to your pride and joy.

- Large range of hard rubber classic vehicle batteries, available in 6v and 12v.
- Period looking batteries.
- Battery re-build service available.
- Technical advice and support.
- Flexible lead times & customer delivery schedules.
- British engineered.
- Chargers available upon request.
- Recycling service available.
- Available with acid packs, ready to fit.

Our classic vehicle batteries fit a full range of classic cars including: Alfa Romeo, Aston Martin, Ferrari, Fiat, Jaguar, Landrover, Lotus, Maserati, Porsche, Rolls Royce, TVR, Volkswagen and many more...



Powering the future since 1910...

www.shieldbatteries.co.uk

HARD RUBBER RANGE - 6 VOLT

Part No	Nearest Din Type	AH @ 20 Hr rate	Lid Type	DIMENSIONS (mm)				Layout	Terminal Type	Base Holdown Features	Acid Qty Litres
				Length	Width	Height	Total Height				
280	11213	150	BAR	503	98	192	217	9	T1	N	4
311LBH		60	BAR	225	179	164	189	0	T1	TOP	3
401	06611	60	BAR	186	170	164	189	0	T1	N	3
404	07715	71	BAR	215	171	165	190	0	T1	B12	3
404/15	07715	79	BAR	215	171	165	190	0	T1	B12	3
404/19	07715	102	BAR	215	171	165	190	0	T1	B12	3
421	05611	58	BAR	169	174	192	217	0	T1	N	3
421/11	05611	73	BAR	169	174	192	217	0	T1	N	3
421/13	05611	88	BAR	169	174	192	217	0	T1	N	3
421/M	05611	58	MONO	169	174	192	217	0	T1	N	3
451	18011	190	BAR	412	175	200	225	1	T1	N	6
451EU	18011		BAR	392	175	210	235	1	T1	N	6
501	08411	88	BAR	224	173	192	217	0	T1	N	3
501/17	09611	117	BAR	224	173	192	217	0	T1	N	4
501/17TALL	10211	117	BAR	225	173	210	235	0	T1	N	4
511UK	09811	103	BAR	255	172	200	225	0	T1	N	4
511T/UK	09811	131	BAR	255	172	200	225	0	T1	N	4
511	09811	103	BAR	263	172	192	217	0	T1	N	4
511/TALL	12018	117	BAR	263	176	210	235	0	T1	N	4
511/21	09811	146	BAR	263	172	192	217	0	T1	N	4
511/21-V8P		115	BAR	263	172	192	217	0	T1	N	3
521	11211	117	BAR	291	170	202	227	0	T1	N	6
521/21	11211	146	BAR	291	170	202	227	0	T1	N	6
521/EU*	11211	117	BAR	296	173	210	235	0	T1	N	6
531	15012	131	BAR	320	170	201	226	0	T1	N	6
531/EU*	15012	131	BAR	329	175	210	235	0	T1	N	6
531/21	15012	150	BAR	320	170	201	226	0	T1	N	6
541		150	BAR	347	174	200	225	0	T1	N	6
591*		140	BAR	265	173	267	292	0	T1	N	6
702		240	MONO	315	181	372	372	0	T9	B4	7
703		280	MONO	372	181	372	372	0	T9	B4	9
712		240	MONO	315	181	372	397	0	T1	B4	7
713		280	MONO	372	181	372	397	0	T1	B4	9
722		218	MONO	422	176	215	255	0	T9	B4	7
733		218	MONO	422	176	215	240	0	T1	B4	7

HARD RUBBER RANGE - 12 VOLT

Part No	Nearest Din Type	AH @ 20 Hr rate	Lid Type	DIMENSIONS (mm)				Layout	Terminal Type	Base Holdown Features	Acid Qty Litres
				Length	Width	Height	Total Height				
182		65	BAR	332	133	178	203	1	T1	B12	4
183		65	BAR	332	133	178	203	0	T4	B12	4
165		45	BAR	241	134	178	203	1	T1	B12	4
166		45	BAR	241	134	178	203	0	T4	B12	4
182M		65	MONO	330	137	178	203	1	T1	B12	4
183M		65	MONO	330	137	178	203	0	T4	B12	4
241	56037	73	BAR	307	170	205	230	0	T1	N	6
241LOW		60	BAR	307	170	175	200	0	T1	N	4
241/13	56037	88	BAR	307	170	205	230	0	T1	N	6
241/13LOW		71	BAR	307	170	175	200	0	T1	N	4
242	56014	73	BAR	307	170	205	230	1	T1	N	6
242LOW		60	BAR	307	170	175	200	1	T1	N	4
242/13	56014	88	BAR	307	170	205	230	1	T1	N	6
242/13LOW		71	BAR	307	170	175	200	1	T1	N	4
243		102	BAR	346	175	214	239	0	T1	N	6
244		102	BAR	346	175	214	239	1	T1	N	6
279	57016	73	BAR	485	110	195	220	8	T1	N	6
279/LOW		60	BAR	485	110	167	192	8	T1	N	4
279/13	57016	88	BAR	485	110	195	220	8	T1	N	6
279/13LOW		71	BAR	485	110	167	192	8	T1	N	4
291	56011	58	BAR	249	165	197	222	1	T1	N	4
291/11	56011	73	BAR	249	165	197	222	1	T1	N	4
292	56037	58	BAR	249	165	197	222	0	T1	N	4
292/11	56037	73	BAR	249	165	197	222	0	T1	N	4
321*		147	BAR	513	220	200	225	3	T1	N	9
323*		147	BAR	513	220	200	225	4	T1	N	9
324*		190	BAR	513	278	200	225	4	T1	N	10
325*		190	BAR	513	278	200	225	3	T1	N	10
333*	61815	131	BAR	356	250	210	235	6	T1	N	8
333/21*	61815	146	BAR	356	250	210	235	6	T1	N	8
602		102	BAR	370	172	200	225	1	T1	N	7
602/LOW		80	BAR	370	172	168	193	1	T1	N	6
602/17		117	BAR	370	172	200	225	1	T1	N	6
602/17LOW		91	BAR	370	172	168	193	1	T1	N	6
612		117	BAR	445	174	210	235	1	T1	N	7
612LOW	58411	91	BAR	445	174	187	212	1	T1	N	7



Please note: Acid volumes are rounded up so as not to supply split bottles. Black vent caps as standard, yellow available on request.
*Minimum order quantity applies. Dimensions are subject to a 5mm +/- variation.

This document is only a guide as to what battery will fit your vehicle, this does not accomodate for vehicles that may have been modified, or variations of a vehicle that may have come from the factory. Please ensure a battery is suitable for your vehicle before fitting.

powering the future since 1910...

www.shieldbatteries.co.uk